



AT A GLANCE

- Optical coherent receiver in a compact 19"-chassis
- Coherent detection of high-speed optical dual-polarization m-PAM and m-QAM signals
- 40 and 70 GHz O-Band and S-C-L-U-Band versions are available

Features

- Coherent optical receiver in a compact 19"-chassis
- Simultaneous detection of I/Q and both polarizations
- Optical inputs for local oscillator and data signal
- Medium and high-bandwidth version
- Optical extender heads for high signal integrity

Applications

- Test and measurement
- Development of multi-band, high capacity transmission systems and components
- Polarization diverse coherent detection of high-speed data signals with various modulation formats (m-PAM, m-QAM, 4D)
- Coherent receiver frontend for single-mode optical data transmission
- O/E converter for detection of arbitrary optical waveforms
- High-resolution optical spectrum measurements

Target Specifications	CRF-40-EH-O	CRF-70-EH-O
Operating wavelength range (nm) preliminary	O-band (1260 – 1360) S-C-L-U-band available upon request.	
6dB cut-off frequency (GHz)	>50	>70
Average CRF responsivity (sig mA/W)	30	30
Output swing (mVpp) @1GHz	150	
CRF input Sig/LO power (dBm)	12/16	
Common mode rejection ratio (dB _c)	-18 (DC)	
Imbalance I _{Sig} and I _{LO} (dB _o)	2 (DC)	
Phase deviation (deg)	+/- 6 (1280-1340 nm), +/- 10 (1260-1360 nm)	
Optical Return Loss (dBo @1550nm)	30	
Dual polarisation	Yes	
Pol. extinction ratio for Sig & LO (dB _o)	20	
Internal local oscillator laser	No	
Optical extender head	Yes	
Optical connectors	SC-/FC-/LC-/E2000-APC	
HF-impedance (ohm)	50	
HF-connectors	female 1,85 mm V@	
Dimensions (W x H x D in mm)	482 (19'') x 45 x 460	




Dr. rer. nat. Colja Schubert
 Photonic Networks and Systems


Phone +49 30 31002-252 | -414
 info-pn@hhi.fraunhofer.de

Fraunhofer Heinrich Hertz Institute
 Einsteinufer 37, 10587 Berlin
 Germany

www.hhi.fraunhofer.de/pn

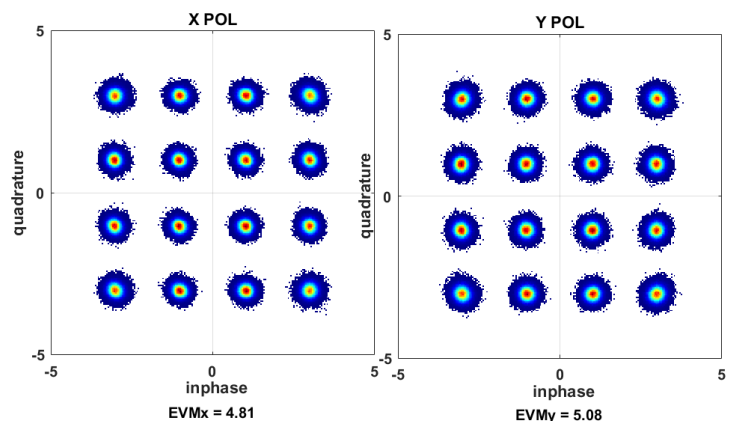

Phase Error

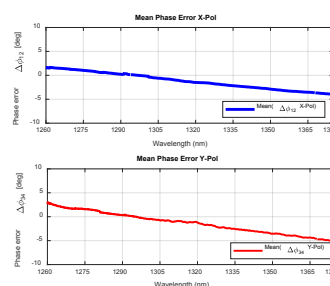

Output Amp.

